

# Blickfeld QbBasic

## Compact, software-defined 3D LiDAR sensor for tailored flexibility and seamless integration



QbBasic is Blickfelds software-defined 3D LiDAR sensor engineered for use in OEM and technology integrator solutions. It offers flexible configuration options, delivers detailed point cloud data for accurate 3D perception and integrates smoothly into diverse hardware and software environments. The user-friendly web interface of QbBasic allows for individual adjustment of parameters, giving system integrators and OEMs the flexibility to precisely adapt the sensor to their application needs. With its compact form factor, and standardized communication interfaces, QbBasic can be easily integrated into a variety of existing platforms.

## TECHNICAL DATA

### PERFORMANCE

Technology	3-dimensional laser ranging (LiDAR)
Maximum field-of-view <sup>a</sup>	90° x 50° (horizontal x vertical)
Typ. application range <sup>b</sup>	1 - 100 m
Typical range precision (1 sigma)	< +/-2 cm
Frame rate	1 – 50 Hz depending on configured scan pattern
Number of returns	3
Vertical resolution <sup>c</sup>	2 - 400 scan lines per frame (user-configurable)
Horizontal resolution	0.25°, 0.5°, 0.75° (user-configurable)

### LASER

Laser class	Class 1, eye-safe (IEC 60825-1:2014)
Laser wavelength	Infrared, 905 nm
Laser beam divergence	0.25° x 0.25°


### DATA PROCESSING AND OUTPUT DATA

Integrated web interface	Interactive 3D point cloud visualization, device configuration, output specification
Integrated inertial measurement unit (IMU)	TDK IvenSense ICM-20600
LiDAR data	Cartesian coordinates and intensity per return, timestamp per acquisition
IMU data	3 axis acceleration data
API	TLS-secured gRPC network protocol, ROS2 driver, Raw protobuf files and client libraries for Python and C++ available <sup>d</sup>

### OPERATIONAL

Dimensions (H x W x D) <sup>e</sup>	Ca. 75 mm x 111 mm x 83 mm
Weight <sup>e</sup>	Ca. 535 g
Voltage input	Power over Ethernet (PoE), IEEE 802.3at Type 1
Ingress protection <sup>f</sup>	IP67 (IEC 60529)
Operating ambient temperature <sup>g</sup>	-30 °C ... +60 °C
Storage temperature	-40 °C ... +60 °C
Conformity marks / compliance	CE, UKCA, REACH, FDA, FCC, SRRC TAA-compliant product variants available upon request

## DIMENSIONS

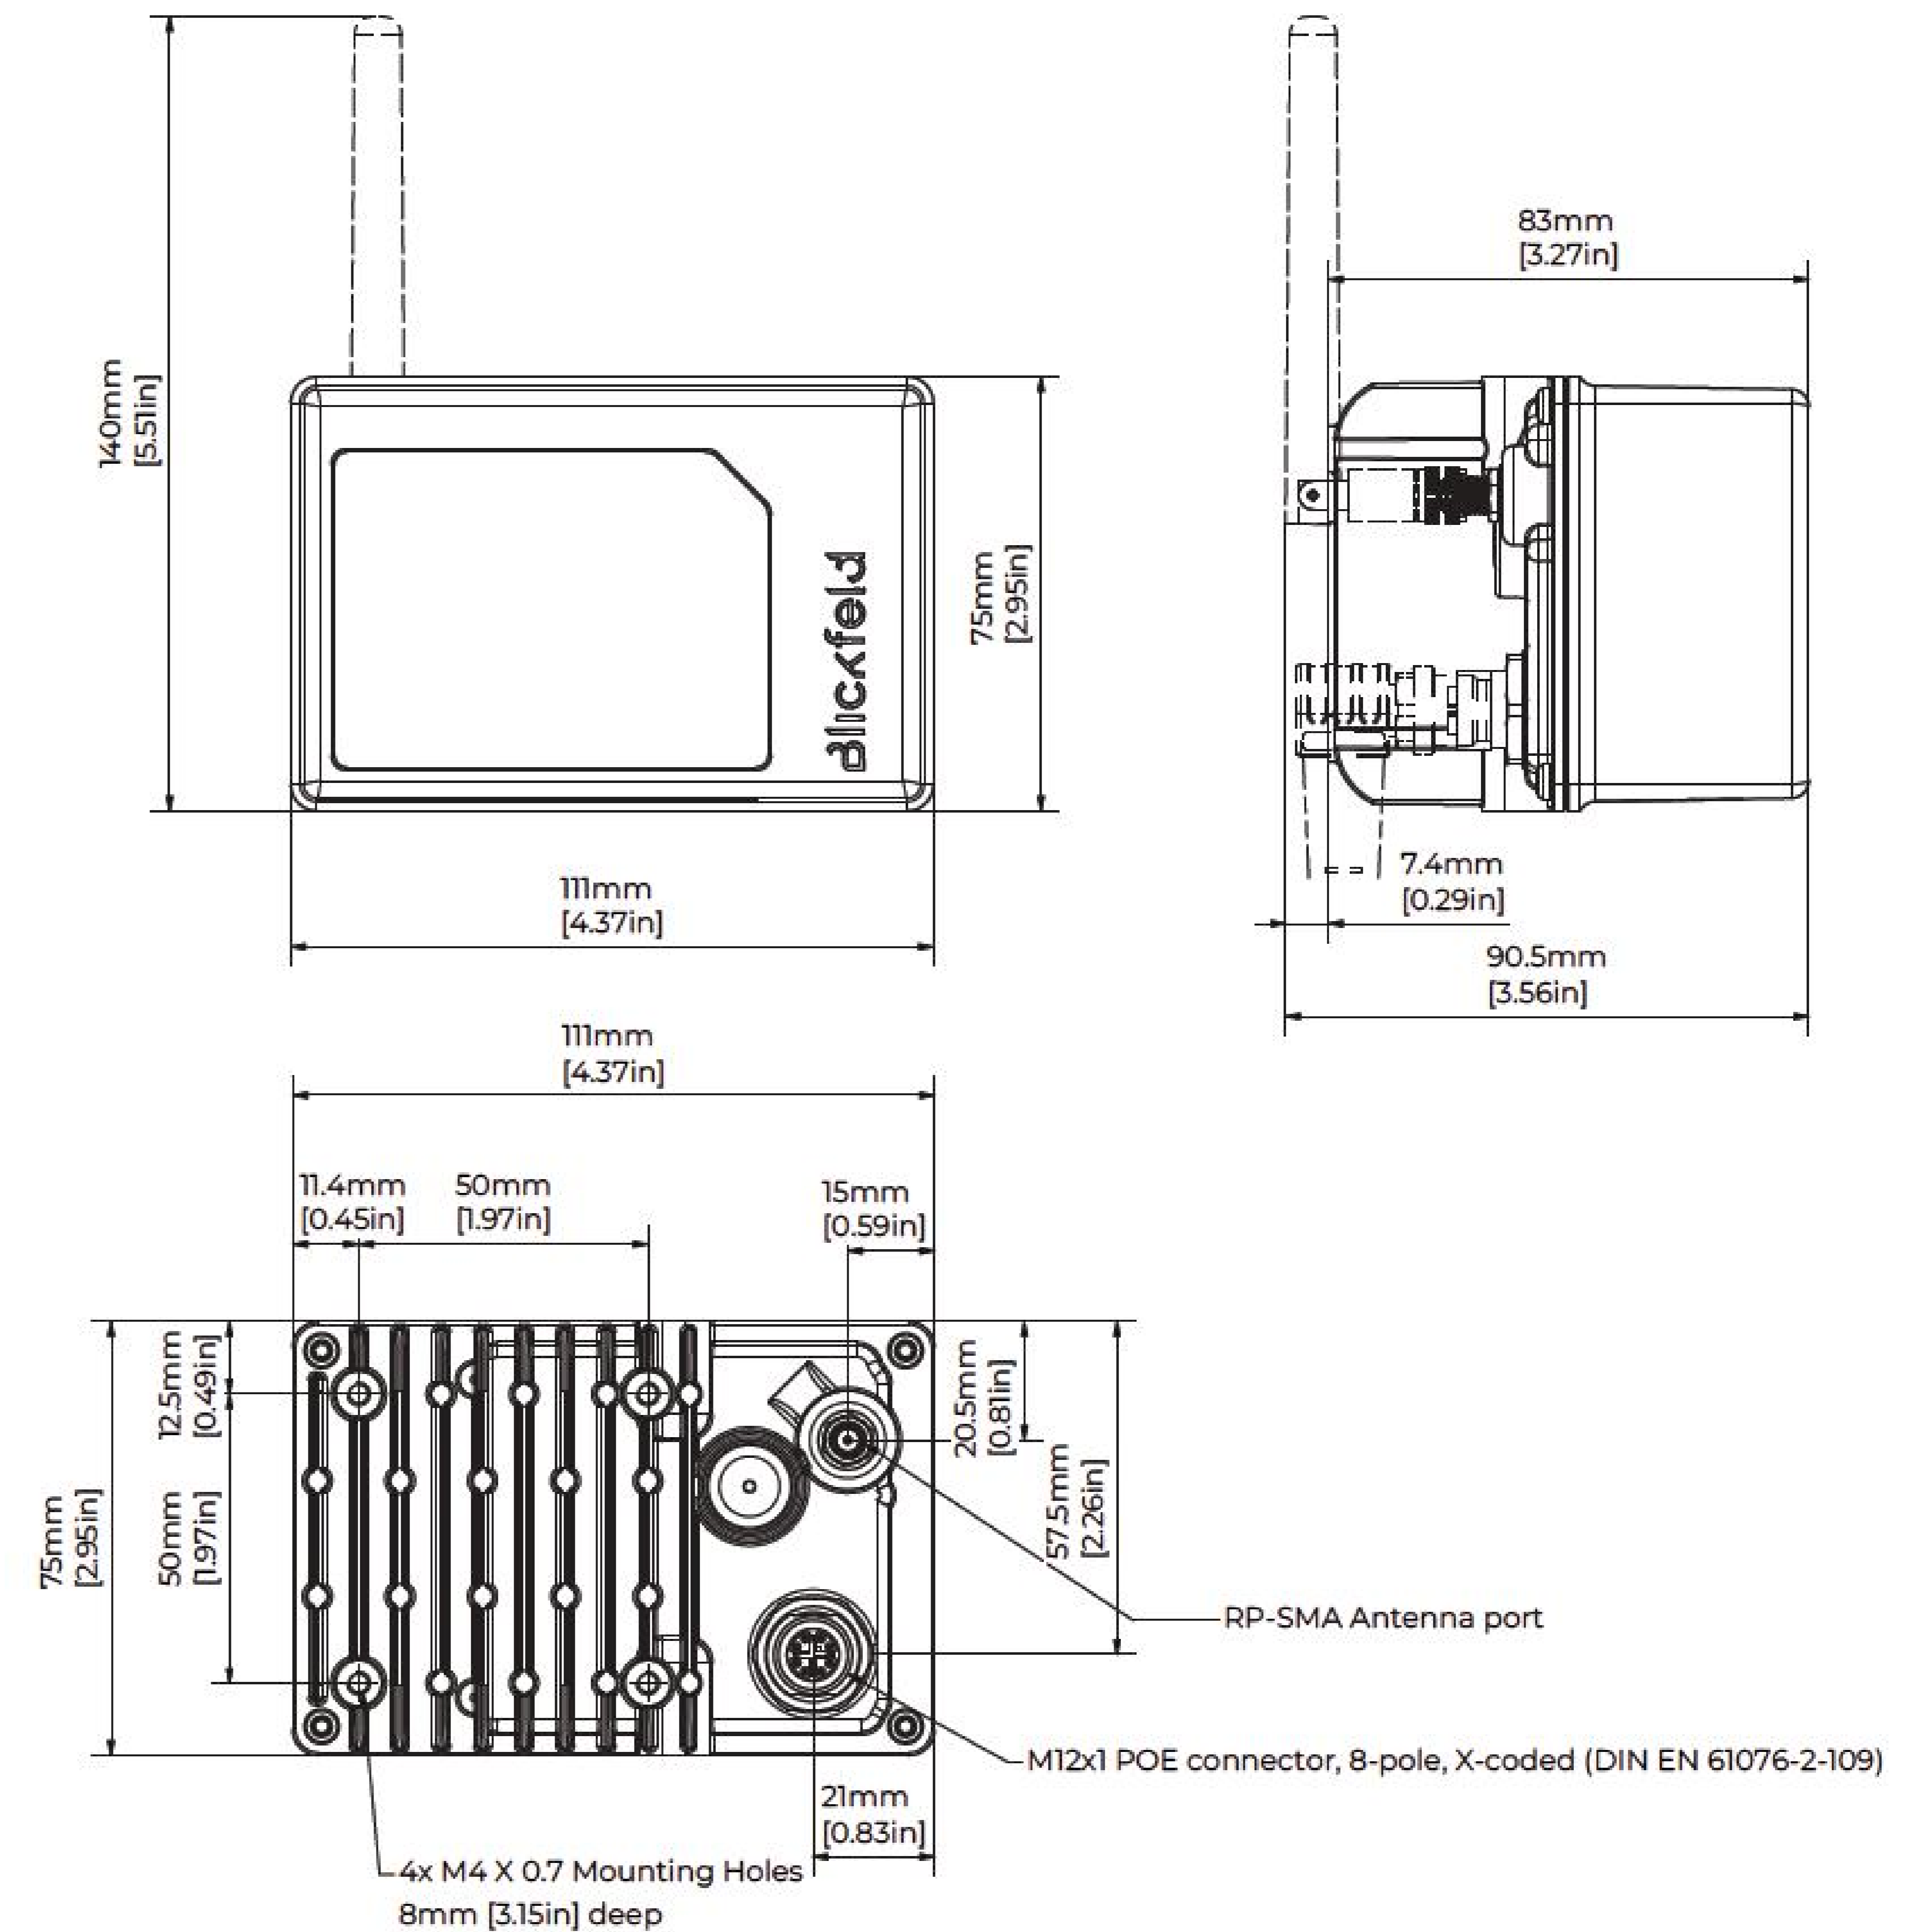

values in brackets are calculated and may contain round-off errors

INTERFACES	
<b>LAN connection</b>	Ethernet 1000 Base-T (1 Gbit/s)
<b>WiFi connectivity</b>	2.4 GHz: IEEE 802.11b/g/n, antenna included
<b>Ethernet connector</b>	M12x1 Industrial Ethernet connector, 8-pole, X-coded (EN 61076-2-109), IP67 <sup>h</sup>
<b>Security</b>	User & API-key authentication (multiple access levels, read-only access), 802.1X & WPA2 (EAP)
<b>Protocols</b>	ARP, ICMP, DHCP, DNS, TLS, 802.1X, UDP, NTP, IPv4, IPv6, TCP/IP, HTTP, HTTPS, gRPC
ACCESSORIES	
<b>Antenna</b>	Matching WiFi antenna (included). WiFi operation only permitted with Blickfeld-authorized antenna.
<b>Cable</b>	Matching Ethernet cable, length: 3 / 7 / 10 m. M12x1 Industrial Ethernet connector to RJ45, straight, Cat. 6a, X-coded, 8-pole, UV-resistant, halogen-free, PUR jacket
<b>Mounting</b>	Pan-tilt mounting bracket
<b>Add-on</b>	Weather protection roof

- a Non-rectangular field-of-view
- b Range performance depends on many factors including but not limited to object reflectivity, orientation, surface texture, ambient light level, and ambient temperature. Reduced accuracy and resolution in small areas of the field of view in close distance to the sensor.
- c Less than 35 scan lines requires reduced field-of-view
- d Online documentation available at <https://docs.blickfeld.com/qb2>
- e Without antenna or Ethernet cable attached
- f With antenna and Ethernet cable attached or with protective caps attached
- g Continuous operation between -37°C and 60°C. Increased start-up time (max. 30 min) for temperatures below -30°C
- h IP67 with Ethernet cable and protective cap attached